



UNITED MOTORS SERVICE

DIVISION OF GENERAL MOTORS CORPORATION

General Offices - Detroit

AUTO RADIO BULLETIN

Bulletin	862 6D-854
Chevrolet	987364
Date	11-1-55
Page	1
FIRST ISSUE	

SUBJECT: SERVICE INSTRUCTIONS — 12V CHEVROLET CUSTOM DELUXE MODEL 987364

GENERAL

MOUNTING—All 1956 Chevrolet Cars.

TUBES—Six, Plus Rectifier and Trigger.

SPEAKER—6"x9" Permanent Magnet.


TUNING—Electronic, Pushbutton, and Manual.—Series F-1.

ANTENNA TRIMMER COMPENSATION—For Antennas Between 0.000058 - 0.000090 Mfd.

TUNING RANGE—540-1600 KC.

PUSHBUTTON SET-UP

1. Open the hinged door below the dial exposing the selector tabs.
2. Tune in the desired signal nearest the left end of the dial.
3. Move the first selector tab (one farthest left) until it lines up with the pointer tip.
4. Repeat set-up steps 2 and 3 for the remaining selector tabs, choosing stations from left to right on the dial.
5. Check the settings of each selector tab by depressing the corresponding station selector button. If the correct station is not tuned in re-adjust the selector tab.

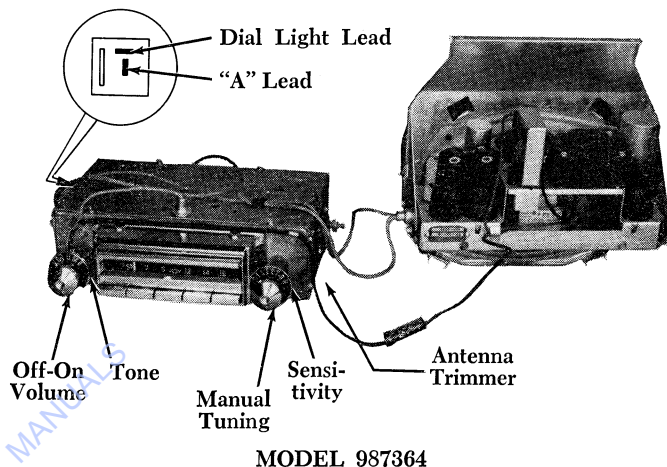

SERVICE INFORMATION—This model is identical to Model 987086 (Bulletin 6D-854) except for the following Service Parts.

Illus. No.	Service Part No.	Description
ELECTRICAL PARTS		
Capacitors		
*19	*7266596	.000250 mfd. temp. compensating
*33	*1220885	Spark Plate Cap. Assy.
Resistors		
47	1118	270 ohms ½W.
*74	*7266320	750 ohms ½W.
*75	*7266236	33,000 ohms 1W. ±5%
80	1229	330K ohms ½W.
Tubes		
	12AU6	12AU6
MISCELLANEOUS		
*88	*7267048	Solenoid & Plunger Assy.
INSTALLATION PARTS		
	1990825	Knob, Control

* Part first used in 1956.

